




LIGHTQ - LED Landscape Range



IP68 TECHNOLOGY

Reliability is The Most Important Factor

- Patented IP68 design disperses heat from LED to maintain thermal characteristics for optimal long life performance
- IP68 stability is attained through high precision machining of the housing for a perfect threaded mechanical fit
- IP68 protection without the use of glue or sealants that are subject to change in extreme environments ensures long life and easy maintenance
- Robust fixture, the construction is able to bear 2,000 KGS compression and is compliant with IK10

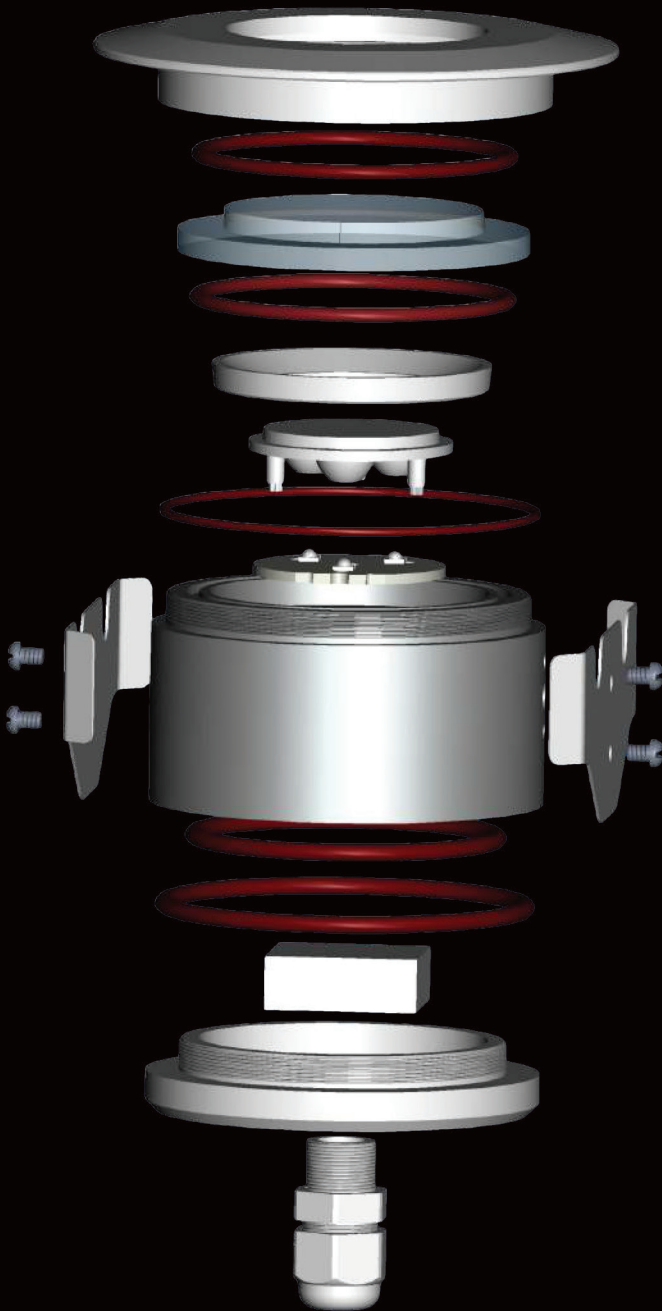



LQ-IG-12 Mini Indicator Landscape



Features


- Creates striking wall effect with focus beam.
- IP65 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit.
- Stainless steel (316) ensures corrosion free outdoor performance in salty and damp environments.

Material

- Body: Stainless steel 316
- Glass: Tempered glass

Applications

- Outdoors, gardens, landscapes (submersible up to 9m)

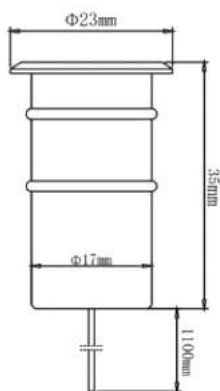

LQ-IG-12 Inground Landscape Light Series External
350mA LED driver is required for single colour
External 12VDC LED driver is required for RGB colour
Lumen output: 100lm

Product Code	Lumen output	Beam	LED power	System power	CCT	CRI	LED Brand
LQ-IG-12-W	100lm	60°	1W	1.2W	3000K	80	CREE
LQ-IG-12-WW	100lm	60°	1W	1.2W	4000K	80	CREE
LQ-IG-12-B	100lm	60°	1W	1.2W	Blue	80	CREE
LQ-IG-12-G	100lm	60°	1W	1.2W	Green	80	CREE
LQ-IG-12-R	100lm	60°	1W	1.2W	RED	80	CREE
LQ-IG-12-Y	100lm	60°	1W	1.2W	Yellow	80	CREE
LQ-IG-12-RGB	100lm	60°	1W	1.2W	RGB	80	Edison

Item No	Product Code	Description	
LQ-01310	LQ-IG-12-W	Cool White 60deg 1W-350MA stainless inground uplighter	
LQ-01311	LQ-IG-12-WW	Warm White 60deg 1W-350MA stainless inground uplighter	
LQ-01312	LQ-IG-12-B	Blue 60deg 1W-350MA stainless inground uplighter	
LQ-01313	LQ-IG-12-G	Green 60deg 1W-350MA stainless inground uplighter	
LQ-01314	LQ-IG-12-R	Red 60deg 1W-350MA stainless inground uplighter	
LQ-01315	LQ-IG-12-Y	Amber 60deg 1W-350MA stainless inground uplighter	
LQ-01316	LQ-IG-12-RGB	RGB 60deg 1W-350MA stainless inground uplighter	

LQ-IG-18 Inground Indicator Light

IP68
[9m]



Power
1W

Input
24VDC



Features

- A perfect marker light for in-ground, underwater or outdoor applications.
- IP68 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit.
- Stainless steel (316) ensures corrosion free outdoor performance in salty and damp environments.

Material

- Body: Stainless steel 316
- Glass: Tempered frosted glass

Applications


- Outdoors, gardens, landscapes (submersible up to 9m)

LQ-IG-18 Inground Landscape Light Series

External 24VDC LED driver is required for single colour

External 350mA LED RGB controller is required for RGB

Lumen output: 100lm

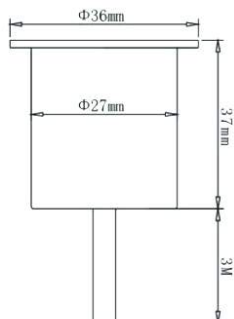

Product Code	Lumen output	Beam	LED power	System power	CCT	CRI	LED Brand
LQ-IG-18-W	100lm	120°	1W	1.2W	3000K	80	CREE
LQ-IG-18-WW	100lm	120°	1W	1.2W	4000K	80	CREE
LQ-IG-18-B	100lm	120°	1W	1.2W	Blue	80	CREE
LQ-IG-18-G	100lm	120°	1W	1.2W	Green	80	CREE
LQ-IG-18-R	100lm	120°	1W	1.2W	RED	80	CREE
LQ-IG-18-Y	100lm	120°	1W	1.2W	Yellow	80	CREE
LQ-IG-18-RGB	100lm	120°	1W	1.2W	RGB	80	Edison

Item No	Product Code	Description	
LQ-01350	LQ-IG-18-W	Cool White 120deg 1W-24DC stainless inground uplighter	
LQ-01351	LQ-IG-18-WW	WarmWhite 120deg 1W-24DC stainless inground uplighter	
LQ-01352	LQ-IG-18-B	Blue White 120deg 1W-24DC stainless inground uplighter	
LQ-01353	LQ-IG-18-G	Green 120deg 1W-24DC stainless inground uplighter	
LQ-01354	LQ-IG-18-R	Red 120deg 1W-24DC stainless inground uplighter	
LQ-01355	LQ-IG-18-Y	Amber 120deg 1W-24DC stainless inground uplighter	
LQ-01366	LQ-IG-18-RGB	RGB 120deg 1W-24DC stainless inground uplighter	

LQ-IG-19 Inground mini recess light

IP68
[9m]




Power
1W


Input
24VDC



Round LQ-IG-19

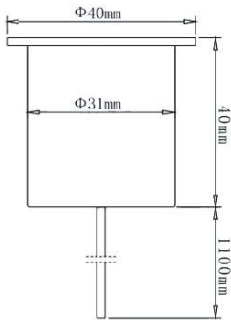

Square LQ-IG-19

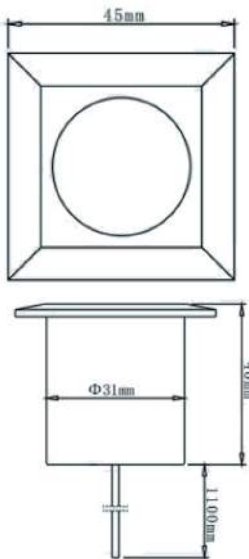

Features

- Creates striking wall effect with focus beam.
- IP65 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit.
- Stainless steel (316) ensures corrosion free outdoor performance in salty and damp environments.

Material

- Body: Stainless steel 316
- Glass: Tempered glass

Applications

- Outdoors, gardens, landscapes (submersible up to 9m)

LQ-IG-19 Inground Landscape Light
Series External 24VDC LED driver is
required Lumen output: 100lm

Round: LED-IG-19




Product Code	Lumen output	Beam	LED power	System power	CCT	CRI	LED Brand
LQ-IG-19-W-60	100lm	60°	1W	1.2W	3000K	80	CREE
LQ-IG-19-WW-60	100lm	60°	1W	1.2W	4000K	80	CREE
LQ-IG-19-B-60	100lm	60°	1W	1.2W	Blue	80	CREE
LQ-IG-19-G-60	100lm	60°	1W	1.2W	Green	80	CREE
LQ-IG-19-R-60	100lm	60°	1W	1.2W	RED	80	CREE
LQ-IG-19-Y-60	100lm	60°	1W	1.2W	Yellow	80	CREE

Square: LED-IG-19

Product Code	Lumen output	Beam	LED power	System power	CCT	CRI	LED Brand
LQ-IG-19-SQR-W-60	100lm	60°	1W	1.2W	3000K	80	CREE
LQ-IG-19-SQR-WW-60	100lm	60°	1W	1.2W	4000K	80	CREE
LQ-IG-19-SQR-B-60	100lm	60°	1W	1.2W	Blue	80	CREE
LQ-IG-19-SQR-G-60	100lm	60°	1W	1.2W	Green	80	CREE
LQ-IG-19-SQR-R-60	100lm	60°	1W	1.2W	RED	80	CREE
LQ-IG-19-SQR-Y-60	100lm	60°	1W	1.2W	Yellow	80	CREE

Item No	Product Code	Description	
LQ-01410	LQ-IG-19-W-60	Cool White 60deg 1W-24DC stainless inground uplighter	
LQ-01411	LQ-IG-19-WW-60	Warm White 60deg 1W-24DC stainless inground uplighter	
LQ-01412	LQ-IG-19-B-60	Blue 60deg 1W-24DC stainless inground uplighter	
LQ-01413	LQ-IG-19-G-60	Green 60deg 1W-24DC stainless inground uplighter	
LQ-01414	LQ-IG-19-R-60	Red 60deg 1W-24DC stainless inground uplighter	
LQ-01415	LQ-IG-19-Y-60	Amber 60deg 1W-24DC stainless inground uplighter	
LQ-00000	LQ-IG-19-Y-60	RGB 60deg 1W-24DC stainless inground uplighter	
LQ-01418	LQ-IG-19-SQR-W-60	Cool White 60deg 1W-24DC square stainless inground uplighter	
LQ-01419	LQ-IG-19-SQR-WW-60	Warm White 60deg 1W-24DC square stainless inground uplighter	
LQ-01439	LQ-IG-19-CAN	Inground canister to suit LQ-IG-19 fixtures	

LQ micro - Ground Light

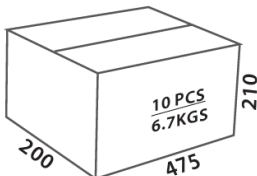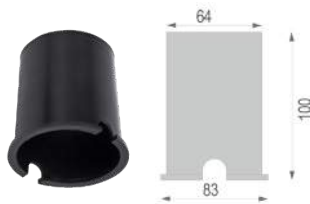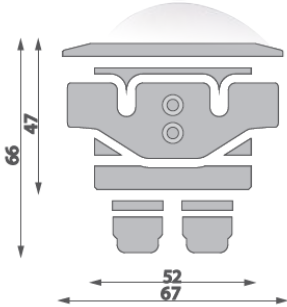

Features

- A perfect marker light for in-ground, underwater or outdoor applications.
- IP68 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit.
- 8 mm tempered glass lens supports up to 2,000 kg “drive over” performance.
- Very low surface temperature lens can be touched without injury.

Material

- Cover: Stainless steel 316
- Body: Anodized Aluminium
- Glass: Tempered glass


Applications

- Outdoors, gardens, landscapes

LQ Micro Ground Light Series
External 24VDC LED driver is required (Non-Dimmable)
Lumen output: 70-80lm




Product Code	Lumen output	cd	Beam	LED power	System power	CCT	CRI	LED Brand
LQ-2-W3-15	70lm	715	15°	1.6W	2W	3000K	83	CREE
LQ-2-W4-15	80lm	735	15°	1.6W	2W	4000K	83	CREE
LQ-2-W3-40	70lm	145	40°	1.6W	2W	3000K	83	CREE
LQ-2-W4-40	80lm	155	40°	1.6W	2W	4000K	83	CREE

Efficiency: 40 lm/W
Life time: 50,000 hours (70% Lumen maintenance)
3 Years Guarantee

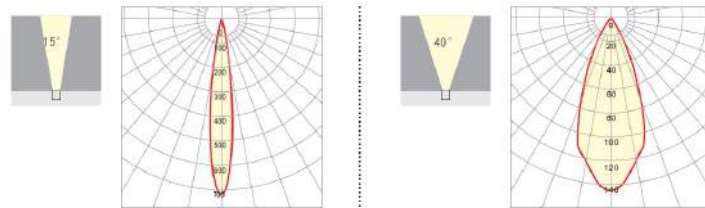

Item No	Product Code	Description	
LQ-01800	LQ-2-W3-15	Warm White 15deg 2W-24DC anodized Alu inground uplighter	
LQ-01802	LQ-2-W3-40	Warm White 40deg 2W-24DC anodized Alu inground uplighter	
LQ-01803	LQ-2-W4-15	Cool White 15deg 2W-24DC anodized Alu inground uplighter	
LQ-01805	LQ-2-W4-40	Cool White 40deg 2W-24DC anodized Alu inground uplighter	

LQ mini - Ground Light

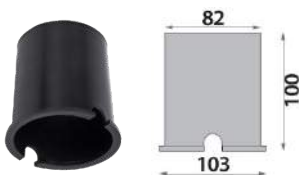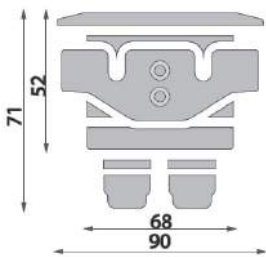

Features

- A perfect marker light for in-ground, underwater or outdoor applications.
- IP68 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit.
- 8 mm tempered glass lens supports up to 2,000 kg “drive over” performance.
- Very low surface temperature lens can be touched without injury.

Material

- Cover: Stainless steel 316
- Body: Stainless steel 316
- Glass: Tempered glass

Applications

- Outdoors, gardens, landscapes

LQ Mini Ground Light Series

External 24VDC LED driver is required (Non-Dimmable)


Lumen output: 250-280lm

Product Code	Lumen output	cd	Beam	LED power	System power	CCT	CRI	LED Brand
LQ-4-W3-15	250lm	2023	15°	4.3W	4.8W	3000K	83	CREE
LQ-4-W4-15	280lm	2171	15°	4.3W	4.8W	4000K	83	CREE
LQ-4-W3-60	250lm	185	60°	4.3W	4.8W	3000K	83	CREE
LQ-4-W4-60	280lm	294	60°	4.3W	4.8W	4000K	83	CREE

Efficiency: 70 lm/W




Life time: 50,000 hours (70% Lumen maintenance)

3 Years Guarantee

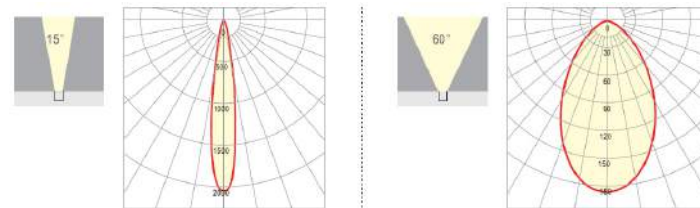

Item No	Product Code	Description	
LQ-01810	LQ-4-W3-15	Warm White 15deg 4.3W-24DC stainless inground uplighter	
LQ-01812	LQ-4-W3-60	Warm White 60deg 4.3W-24DC stainless inground uplighter	
LQ-01813	LQ-4-W4-15	Cool White 15deg 4.3W-24DC stainless inground uplighter	
LQ-01815	LQ-4-W4-60	Cool White 60deg 4.3W-24DC stainless inground uplighter	

LQ maxi - Ground Light

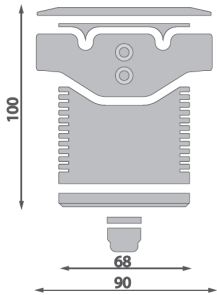

Features

- A perfect marker light for in-ground, underwater or outdoor applications.
- IP68 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit.
- 8 mm tempered glass lens supports up to 2,000 kg “drive over” performance.
- Very low surface temperature lens can be touched without injury.

Material

- Cover: stainless steel 316
- Body: Stainless steel 316
- Glass: Tempered glass

Applications

- Outdoors, gardens, landscapes

LQ Maxi Ground Light Series

External 24VDC LED driver is required (Non-Dimmable)


Lumen output: 750-850lm

Product Code	Lumen output	cd	Beam	LED power	System power	CCT	CRI	LED Brand
LQ-11-W3-20	750lm	3147	20°	11W	11.5W	3000K	83	CREE
LQ-11-W4-20	850lm	3959	20°	11W	11.5W	4000K	83	CREE
LQ-11-W3-60	750lm	840	60°	11W	11.5W	3000K	83	CREE
LQ-11-W4-60	850lm	913	60°	11W	11.5W	4000K	83	CREE

Efficiency: 74 lm/W


Life time: 50,000 hours (70% Lumen maintenance)

3 Years Guarantee

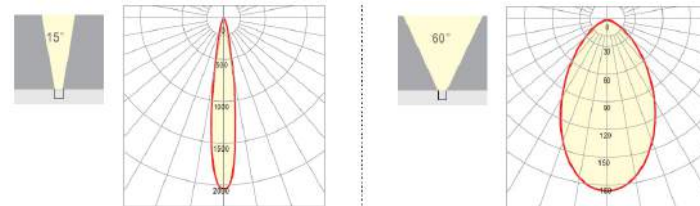

Item No	Product Code	Description	
LQ-01820	LQ-11-W3-20	Warm White 20deg 11.5W-24DC stainless inground uplighter	
LQ-01822	LQ-11-W3-60	Warm White 60deg 11.5W-24DC stainless inground uplighter	
LQ-01823	LQ-11-W4-20	Cool White 20deg 11.5W-24DC stainless inground uplighter	
LQ-01825	LQ-11-W4-60	Cool White 60deg 11.5W-24DC stainless inground uplighter	

LQ mini - Spike Light

IP68
[5m]

Power
4.8W

Input
24VDC


Features

- Creates striking wall effect with focus beam.
- IP68 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit.
- Stainless steel (316) front face ensures corrosion free outdoor performance in salty and damp environments.
- Optional stake mounting offers easy installation and tool free repositioning.

Material

- Body: Stainless steel 316
- Glass: Tempered glass

Applications



- Outdoors, gardens, landscapes

LQ Mini Spike Light Series

External 24VDC LED driver is required (Non-Dimmable)

Lumen output: 250-280lm


Product Code	Lumen output	cd	Beam	LED power	System power	CCT	CRI	LED Brand
LQ-4-W3-15	250lm	2023	15°	4.3W	4.8W	3000K	83	CREE
LQ-4-W4-15	280lm	2171	15°	4.3W	4.8W	4000K	83	CREE
LQ-4-W3-60	250lm	185	60°	4.3W	4.8W	3000K	83	CREE
LQ-4-W4-60	280lm	294	60°	4.3W	4.8W	4000K	83	CREE

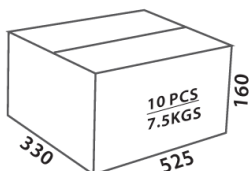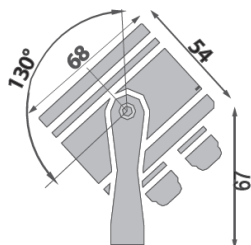

Efficiency: 58 lm/W


Life time: 50,000 hours (70% Lumen maintenance)

3 Years Guarantee

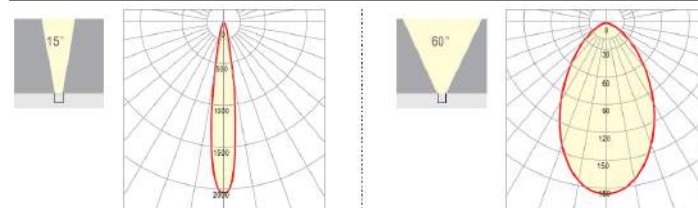

Item No	Product Code	Description	
LQ-01830	LQ-4-W3-15	Warm White 15deg 4.8W-12-24VDC mini stainless spike light	
LQ-01832	LQ-4-W3-60	Warm White 60deg 4.8W-12-24VDC mini stainless spike light	
LQ-01833	LQ-4-W4-15	Cool White 15deg 4.8W-12-24VDC mini stainless spike light	
LQ-01835	LQ-4-W4-60	Cool White 60deg 4.8W-12-24VDC mini stainless spike light	

LQ maxi - Spike Light

 IP68
[5m]

 Power
11.5W

 Input
24VDC


Features

- Creates striking wall effect with focus beam.
- IP68 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit.
- Stainless steel (316) front face ensures corrosion free outdoor performance in salty and damp environments.
- Optional stake mounting offers easy installation and tool free repositioning.

Material

- Body: Stainless steel 316
- Glass: Tempered glass



Applications



- Outdoors, gardens, landscapes

LQ Maxi Spike Light Series

External 24VDC LED driver is required (Non-Dimmable)

Lumen output: 750-850lm


Product Code	Lumen output	cd	Beam	LED power	System power	CCT	CRI	LED Brand
LQ-11-W3-20	750lm	3147	20°	11W	11.5W	3000K	83	CREE
LQ-11-W4-20	850lm	3959	20°	11W	11.5W	4000K	83	CREE
LQ-11-W3-60	750lm	840	60°	11W	11.5W	3000K	83	CREE
LQ-11-W4-60	850lm	913	60°	11W	11.5W	4000K	83	CREE

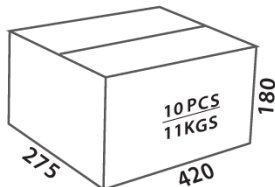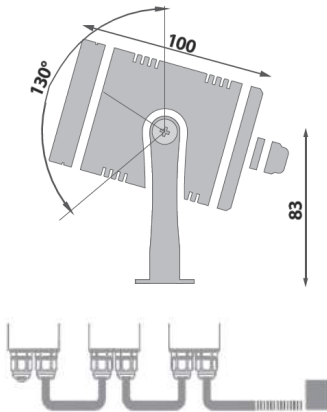

Efficiency: 74 lm/W

Life time: 50,000 hours (70% Lumen maintenance)

3 Years Guarantee

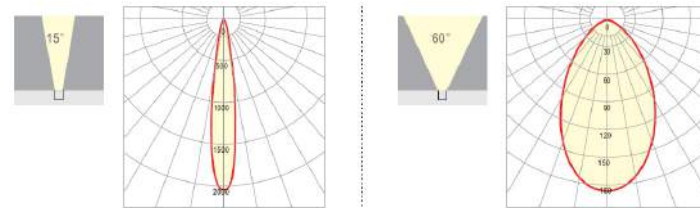

Item No	Product Code	Description	
LQ-01840	LQ-11-W3-20	Warm White 20deg 11.5W-12-24VDC maxi stainless spike light	
LQ-01842	LQ-11-W3-60	Warm White 60deg 11.5W-12-24VDC maxi stainless spike light	
LQ-01843	LQ-11-W4-20	Cool White 20deg 11.5W-12-24VDC maxi stainless spike light	
LQ-01845	LQ-11-W4-60	Cool White 60deg 11.5W-12-24VDC maxi stainless spike light	



LightQ provide Lighting Solutions for all applications.

- **Commercial**
- **Domestic**
- **Landscaping**
- **Carparking**
- **Tennis Courts**
- **Bespoke Luminaries**

Proud distributors of :

- **Luxxbox**
- **GardenQ - Powered by Lumascape**
- **Landscape LED Inground Lighting**
- **Inground LED Glass Tiles**